

# 225 SERIES VALVE

*Ductile Resilient Wedge Gate Valve*



# 225 Series Valve | Ductile Iron Resilient Wedge Gate Valve

The Matco-Norca **225 Series Valve** is a 300 PSI resilient wedge gate valve designed for use as a fire main gate valve. It is also suitable as a potable water, sewer force main and irrigation control valve. The ductile iron body, bonnet and encapsulated wedge provide a 300 PSI valve through 12" sizes while exceeding all the requirements for minimum thickness as required by AWWA C515-15. The flanges and MJ bells are full thickness and exceed all requirements for both C509-15 and C515-15.

This valve is UL listed and FM approved. 100% of Series 225 valves are hydrostatically tested prior to shipment. The test laboratory is certified to ISO 17025 standard and accredited to participate in the UL Witness Test Data Program. The valve can be fitted with a post indicator plate so that both vertical and wall mount post indicators can be attached. The NSF 61 and NSF 372 certifications are provided through UL Water.

The 20 mil thick fusion bonded epoxy is AWWA C550 compliant and covers the full interior and exterior of the valve. Every valve in this series comes standard with a "born on date" for traceability. Each valve has lifting lugs, valve box centering guides and a full flow waterway. Each valve is backed with a ten-year factory warranty. All of these features combined with 5 USA stocking locations allows Matco-Norca to provide a competitively priced valve in a fast and efficient manner.



## FEATURES

- AWWA C515-15 Compliant
- AWWA C509/C515 Flange and MJ Bell Thickness
- AWWA C550 Fusion Bonded Epoxy Coating
- NSF-61/NSF-372 Certified
- UL/FM Fire Main Gate Valve
- 300 PSI 2"-12", 250PSI 14"-16", 200PSI 18"-24"
- Unique "3 UP" valve stem O-ring configuration
- Full Flow Unobstructed Waterway
- Fully Isolated SS Bonnet Bolts
- 10 Year Warranty

## VALVE TESTING PROCEDURES

*The 225 series valves have the following tests performed on them:*

- Stem torque test of twice the minimum required force for each stem diameter
- All Stem diameters per AWWA C515-15
- Ductile iron material has a minimum yield strength of 76,000 PSI and a minimum elongation factor of 13.5%
- Full flow waterways to the AWWA C515-15 standard
- Hydrostatic Gate Test per AWWA C515-15 to twice the PSI rating in each direction
- Minimum number of turns to open per the AWWA C515-15 standard



Global sourcing. National compliance. Local service.

CALIFORNIA

5595 Fresca Dr.,  
La Palma, CA 90623  
Toll Free: 866-532-8306  
Fax: 866-532-8307

TEXAS

1150 Silber Rd.,  
Houston TX 77055  
Toll Free: 800-935-5456  
Fax: 713-680-2999

ILLINOIS


278 Windy Point Dr.,  
Glendale Heights, IL 60139  
Toll Free: 844-412-5068  
Fax: 800-640-2252

GEORGIA

113 Industrial Blvd.,  
Americus, GA 31709  
Toll Free: 800-433-7526  
Fax: 800-533-5134

NEW YORK

PO Box 27, R.22,  
Brewster NY 10509  
Toll Free: 800-431-2082  
Fax: 845-278-9056

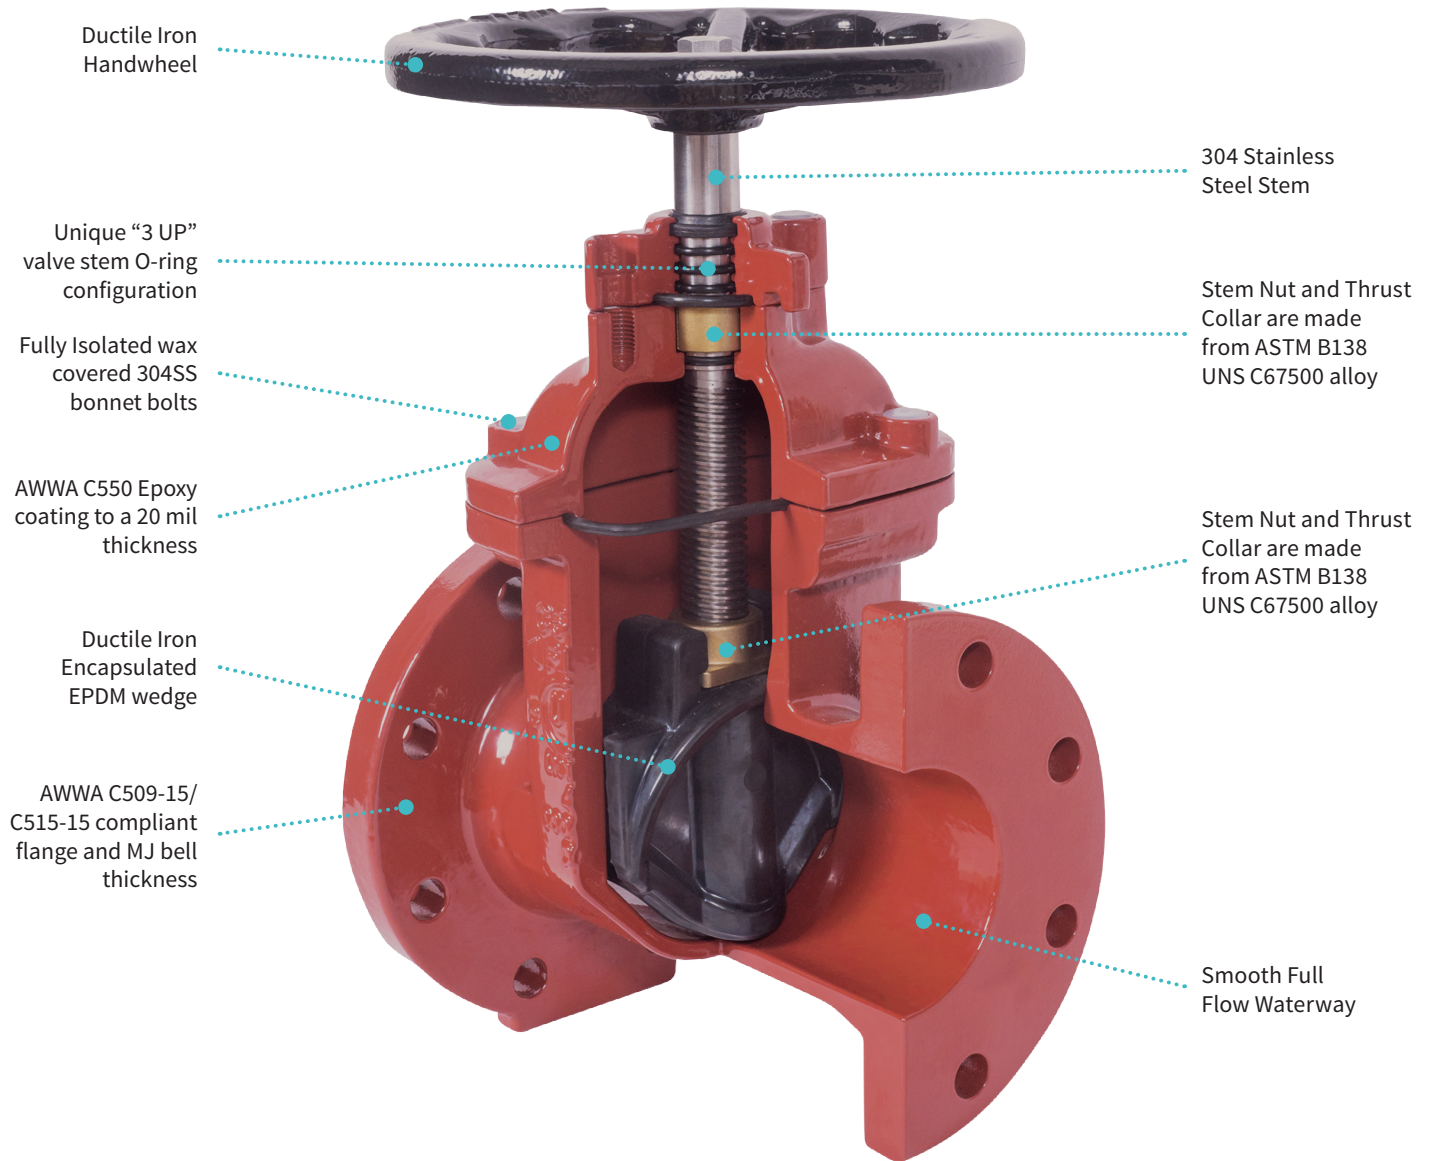

Ductile Iron Handwheel

304 Stainless Steel Stem

Unique "3 UP" valve stem O-ring configuration

Stem Nut and Thrust Collar are made from ASTM B138 UNS C67500 alloy

Fully Isolated wax covered 304SS bonnet bolts

AWWA C550 Epoxy coating to a 20 mil thickness

Stem Nut and Thrust Collar are made from ASTM B138 UNS C67500 alloy

Ductile Iron Encapsulated EPDM wedge

AWWA C509-15/ C515-15 compliant flange and MJ bell thickness

Smooth Full Flow Waterway

MODELS & SIZES

225M – MJ x MJ .....	2" – 24"
225W – FL x FL .....	2" – 24"
225FJ – FL x MJ .....	3" – 12"
225RT – PO x PO .....	3" – 12"
225FP – FLx PO .....	3" – 12"



mail@matco-norca.com  
www.MATCO-NORCA.com



Global sourcing. National compliance. Local service.

**CALIFORNIA**

5595 Fresca Dr.,  
La Palma, CA 90623  
Toll Free: 866-532-8306  
Fax: 866-532-8307

**TEXAS**

1150 Silber Rd.,  
Houston TX 77055  
Toll Free: 800-935-5456  
Fax: 713-680-2999

**ILLINOIS**

278 Windy Point Dr.,  
Glendale Heights, IL 60139  
Toll Free: 844-412-5068  
Fax: 800-640-2252

**GEORGIA**

113 Industrial Blvd.,  
Americus, GA 31709  
Toll Free: 800-433-7526  
Fax: 800-533-5134

**NEW YORK**

PO Box 27, R.22,  
Brewster NY 10509  
Toll Free: 800-431-2082  
Fax: 845-278-9056